


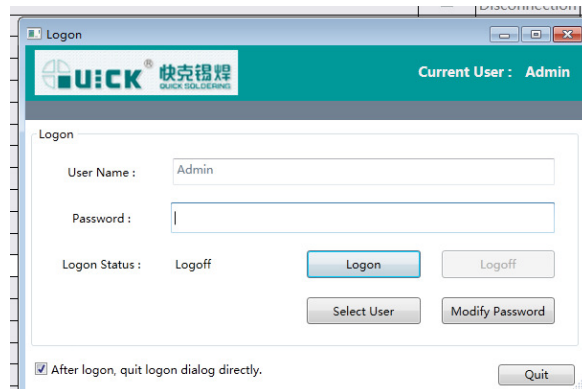
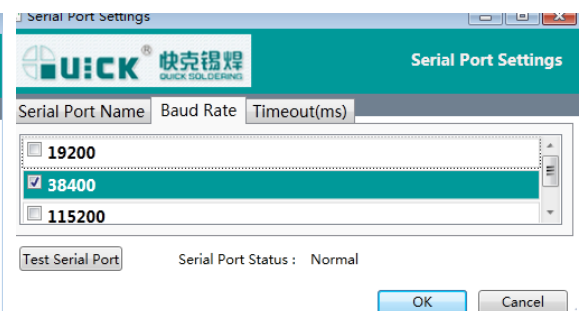


How to use the TS1200 software


1. Click the TS1200 software 
2. Input password "000000" on the Manage Users mune.

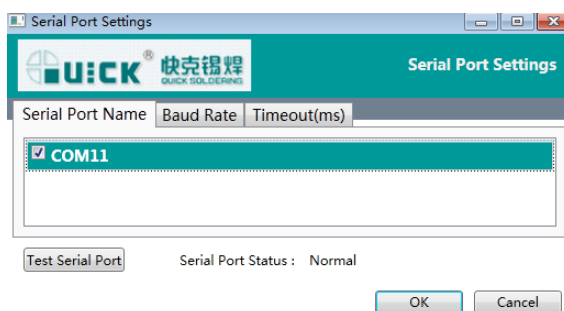

3. Set the communication port, Baud Rate

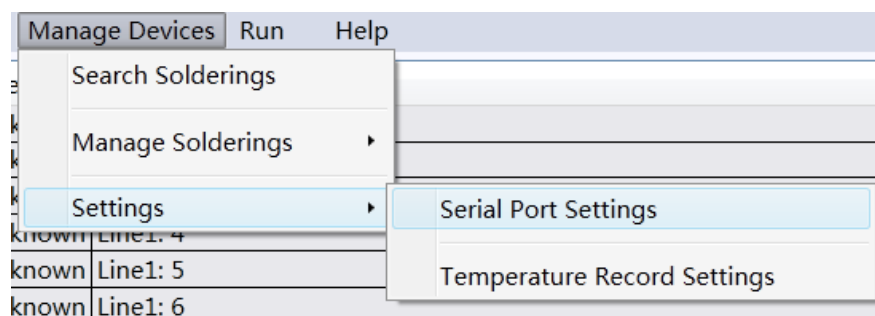


4. Search the TS1200 station

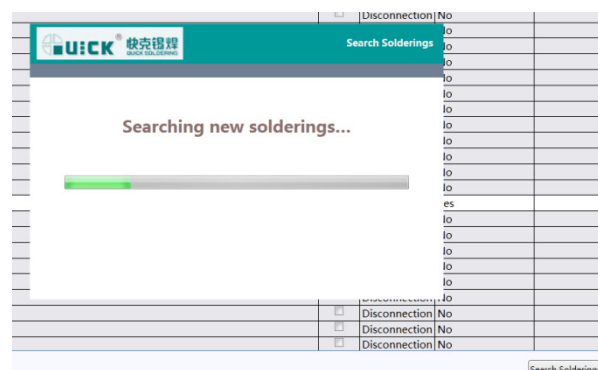


5. Connecting is successful.

	TS1200	Line1: 13		Connection	Yes	Historical Temperature Curve
--	--------	-----------	--	------------	-----	------------------------------

6. Click Run menu

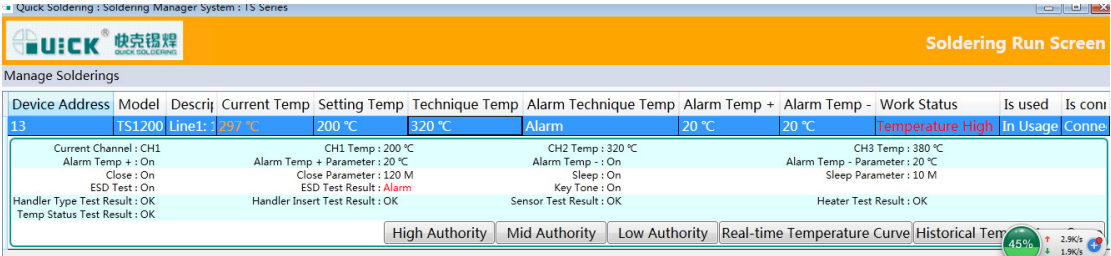

7. If you want to use ESD function, you can select Middle Authority.

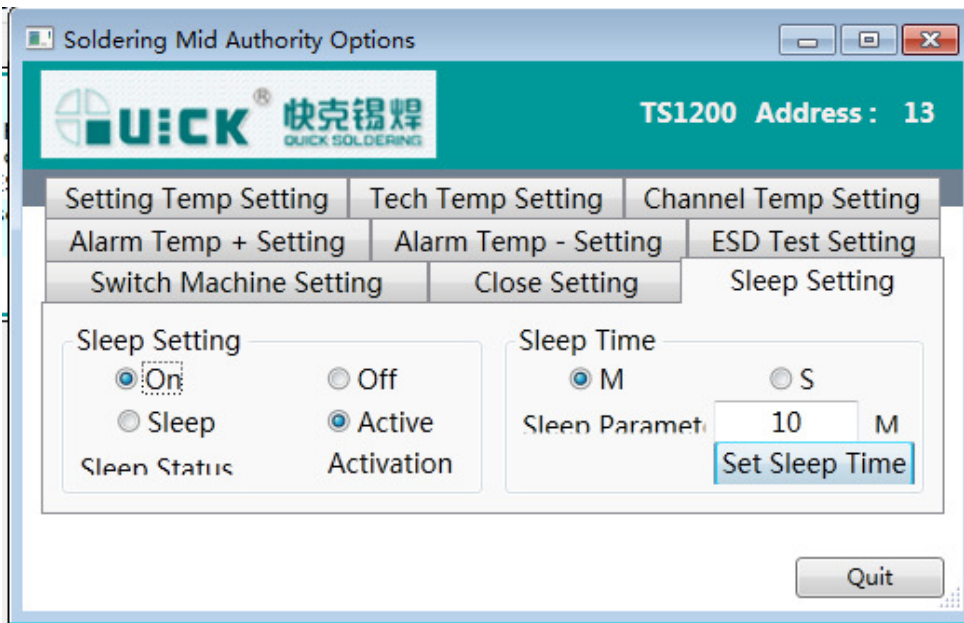

8. The current curve.

